
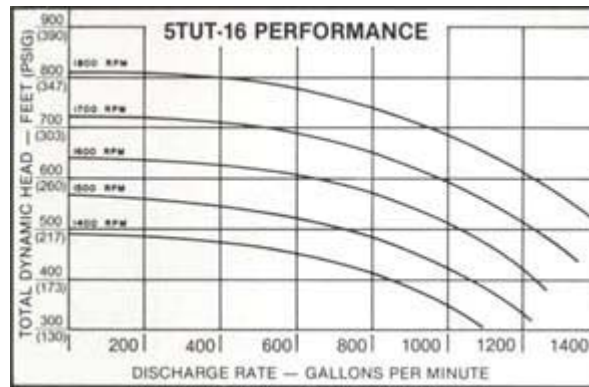


## Jet Pumps

**Conmaco** Jet Pumps are dependable diesel powered jet and water supply pumps. The pump is a Peerless three stage centrifugal split case pump connected with a PTO. The entire unit is mounted on a sturdy steel skid with lifting rack for simple transportation.

For pumping hot or cold fluid against moderate to high heads, contact **Conmaco** about the 5TUT16. Engineered with **Conmaco** quality and backed up by dependable service.

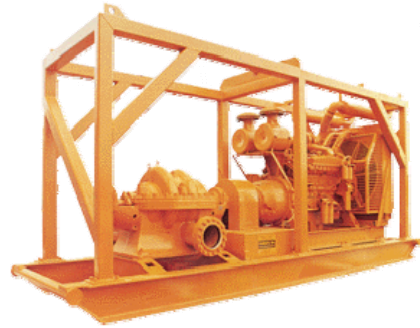

NOTE: Performance ratings are composite performance curves taken from the manufacturers published data and can vary with options and usage conditions. Do not use for purposes of design.

5TUT-16	
<b>PUMP</b>	
Type	3-stage, centrifugal opposed impeller, split case
Max. Pressure	400 psi (27.21 Bars)
Suction Port x Flange Size	6" (15.24 cm) x 125 lb. ANSI
Discharge Port x Flange Size	5" (12.7 cm) x 250 lb. ANSI
Priming	Protek/Hand
Parallel Operation	Yes (with approval)
ENGINE	Choice of engine models with electric, hydraulic or air starting
<b>FUEL TANK</b>	
Capacity	50 gallon (189.25 liter)
Removable	YES
<b>DIMENSIONS</b>	
Length	15'3" (4.65m)
Width	4'4" (1.3m)
Height	6'10" (2.08m)
Weight	10,000 lbs. (4,536 kg)
PAINT	Marine painted with inorganic zinc primer.
OPTIONS	The 5TUT-16 can also be equipped with either gasoline engine-powered primer or air pump priming equipment, suction and discharge hose, 6 x 5" or 5 x 4" swaged nipple for discharge, 6" foot valve and strainer or a 5" silent valve.